

Password protect the ADC-CSVR126 local interface

The user can set up a password that must be entered to interact with the Commercial Stream Video Recorder (CSVR) local user interface.

To set a password for the ADC-CSVR126 local interface:

Note: The primary login for the account will be sent an email notification whenever the password is changed.

1. Log into the Customer Website.
2. Click **Video**.
3. Click **Settings**.
4. Using the *Video Device* dropdown menu, select the CSVR.
5. Click **Local Display**.
6. In *Local Device Password*, enter the desired password.
 - Click  to show the password temporarily.

1234567890123456 

- Click  to hide the password again.

..... 

7. In *Password Protection*, click to select **Enabled**.
8. Click **Save**.


Log in using the local interface

Using a connected mouse: ^

1. Right-click anywhere on the screen.




2. Click the *Password* field.
3. Use the virtual keyboard to enter the password.

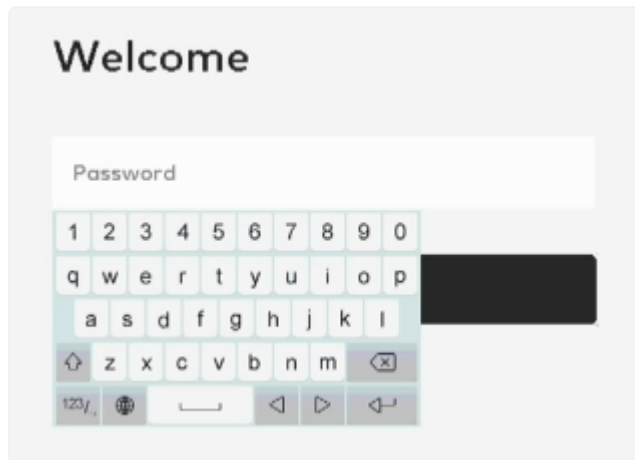

4. Click **Log in**.
5. To exit the login screen without entering a password, right-click.

Using the ADC-CSVR126's navigation buttons: ^

1. Press **[Menu]**.
2. Press and release the down button until the *Password* field is highlighted.
3. Press the center button.
4. Use the virtual keyboard to enter the password.

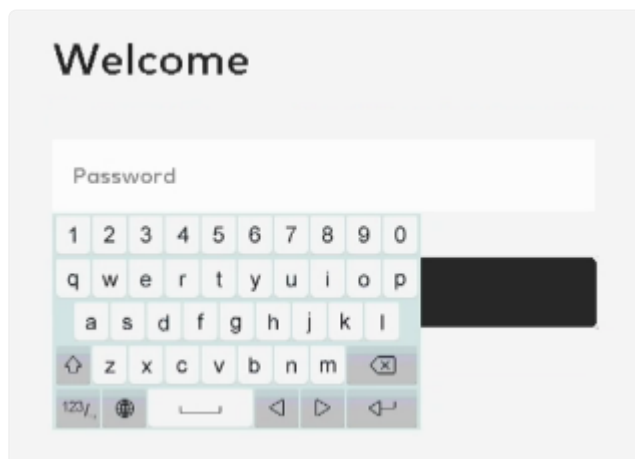


5. Press **[Esc]**.



6. Press the down button.
7. With **Continue** highlighted, press the center button.
8. To exit the login screen without entering a password, press **[Esc]** until the live video reappears.

Local interface too many login attempts

When the user submits an incorrect password more than five times in a row, the local interface is locked for 60 seconds. Once the 60-second timer expires, the interface is unlocked and the user can attempt to enter the password another five times.

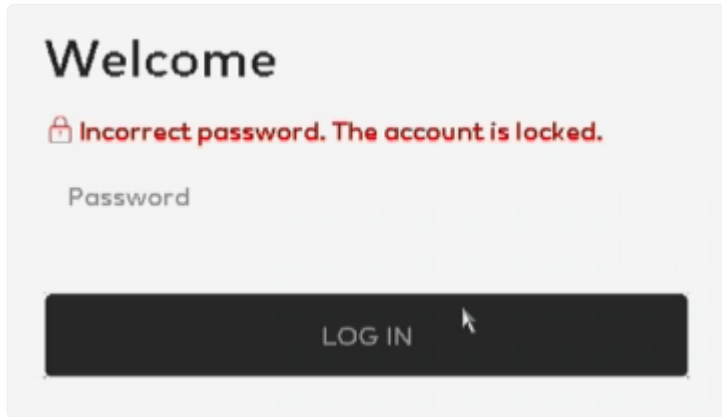

To disable the password for the ADC-CSVR126 local interface:

1. Log into the Customer Website.
2. Click **Video**.
3. Click **Settings**.
4. Using the *Video Device* dropdown menu, select the CSVR.
5. Click **Local Display**.
6. In *Local Device Password*, enter the desired password.

Important: The password is required for first-time setup and any time the ADC-CSVR126 loses its connection to the Internet or power.

7. In *Password Protection*, click to select **Disabled**.

